



SPECIAL TYPE ELECTRIC-BRAKE ASSEMBLY DC MOTOR

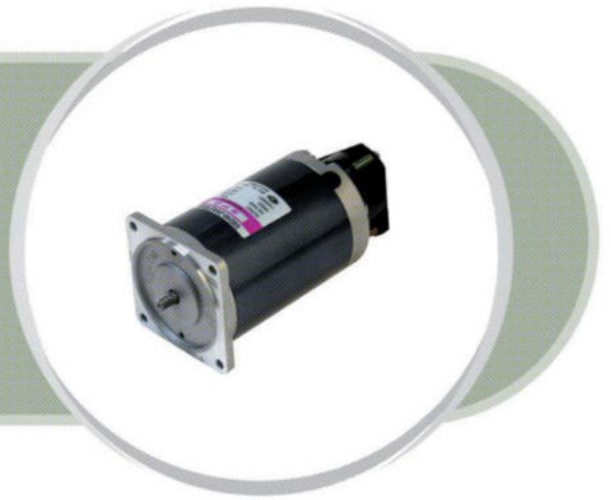

MOTOR DIMENSION

UNIT : mm[inch]

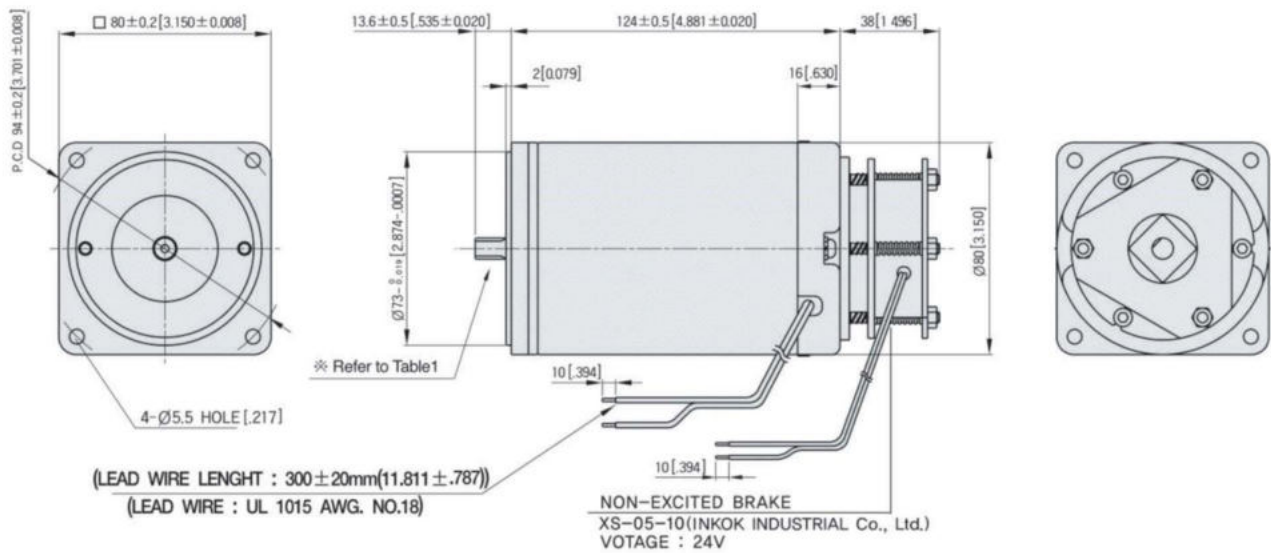

▼ GEAR HEAD 출력축 사양 - (표1)

| MODEL | GEAR TYPE | STRAIGHT TYPE | D-CUT TYPE | KEY TYPE |
|-----------|-----------|---------------|------------|----------|
| 출력축 구멍 | | | | |

MOTOR SPECIFICATION

| Type | Voltage | Output | No Load | | Rated Load | | | Run Duty | Weight (Only motor) |
|-----------------|---------|--------|------------|---------|------------|------------------|---------|----------|---------------------|
| | | | Revolution | Current | Revolution | Torque | Current | | |
| | V | W | RPM | A | RPM | kg · cm(oz · in) | A | Hr | Kg(oz) |
| S8D40-24A(OB85) | 24 | 40 | 3100 | MAX0.8 | 3000 | 1.3(18.05) | 2.1 | 2000 | 2.2(7.6) |

※ Run Duty는 정격전압인가 무부하 기준입니다.