



PM Standard Type Motor

PM35L-048

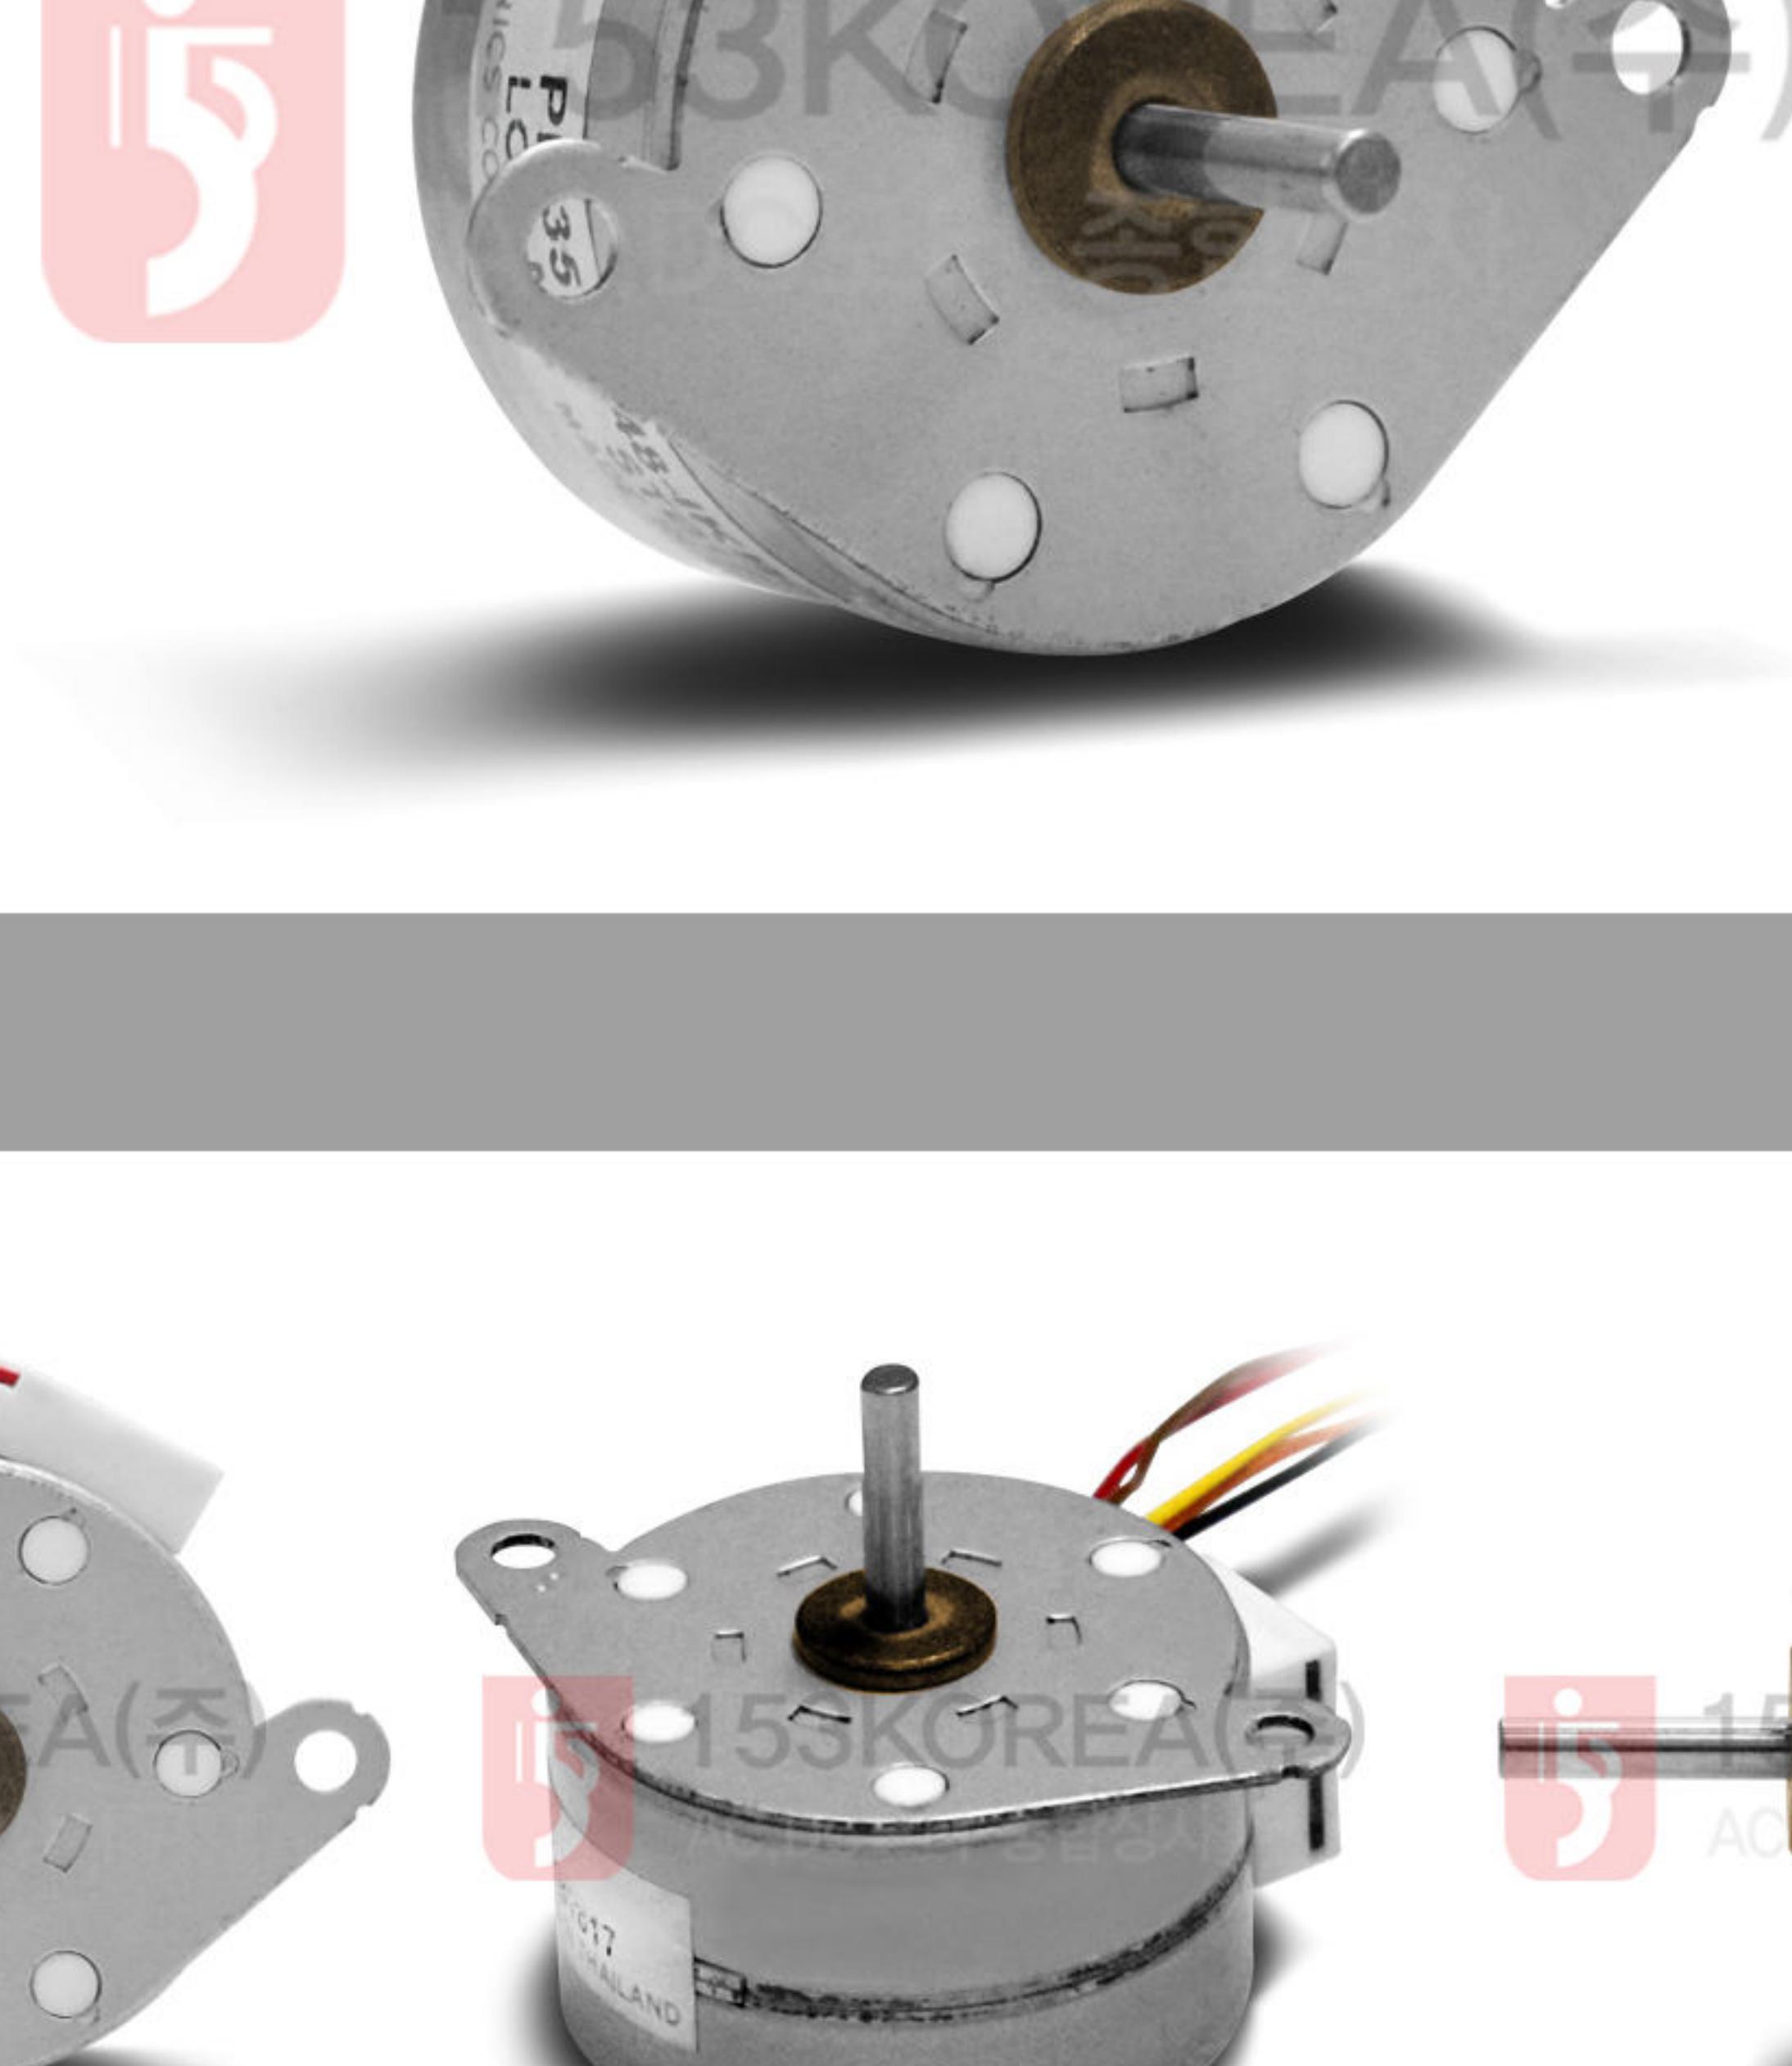

제품사진

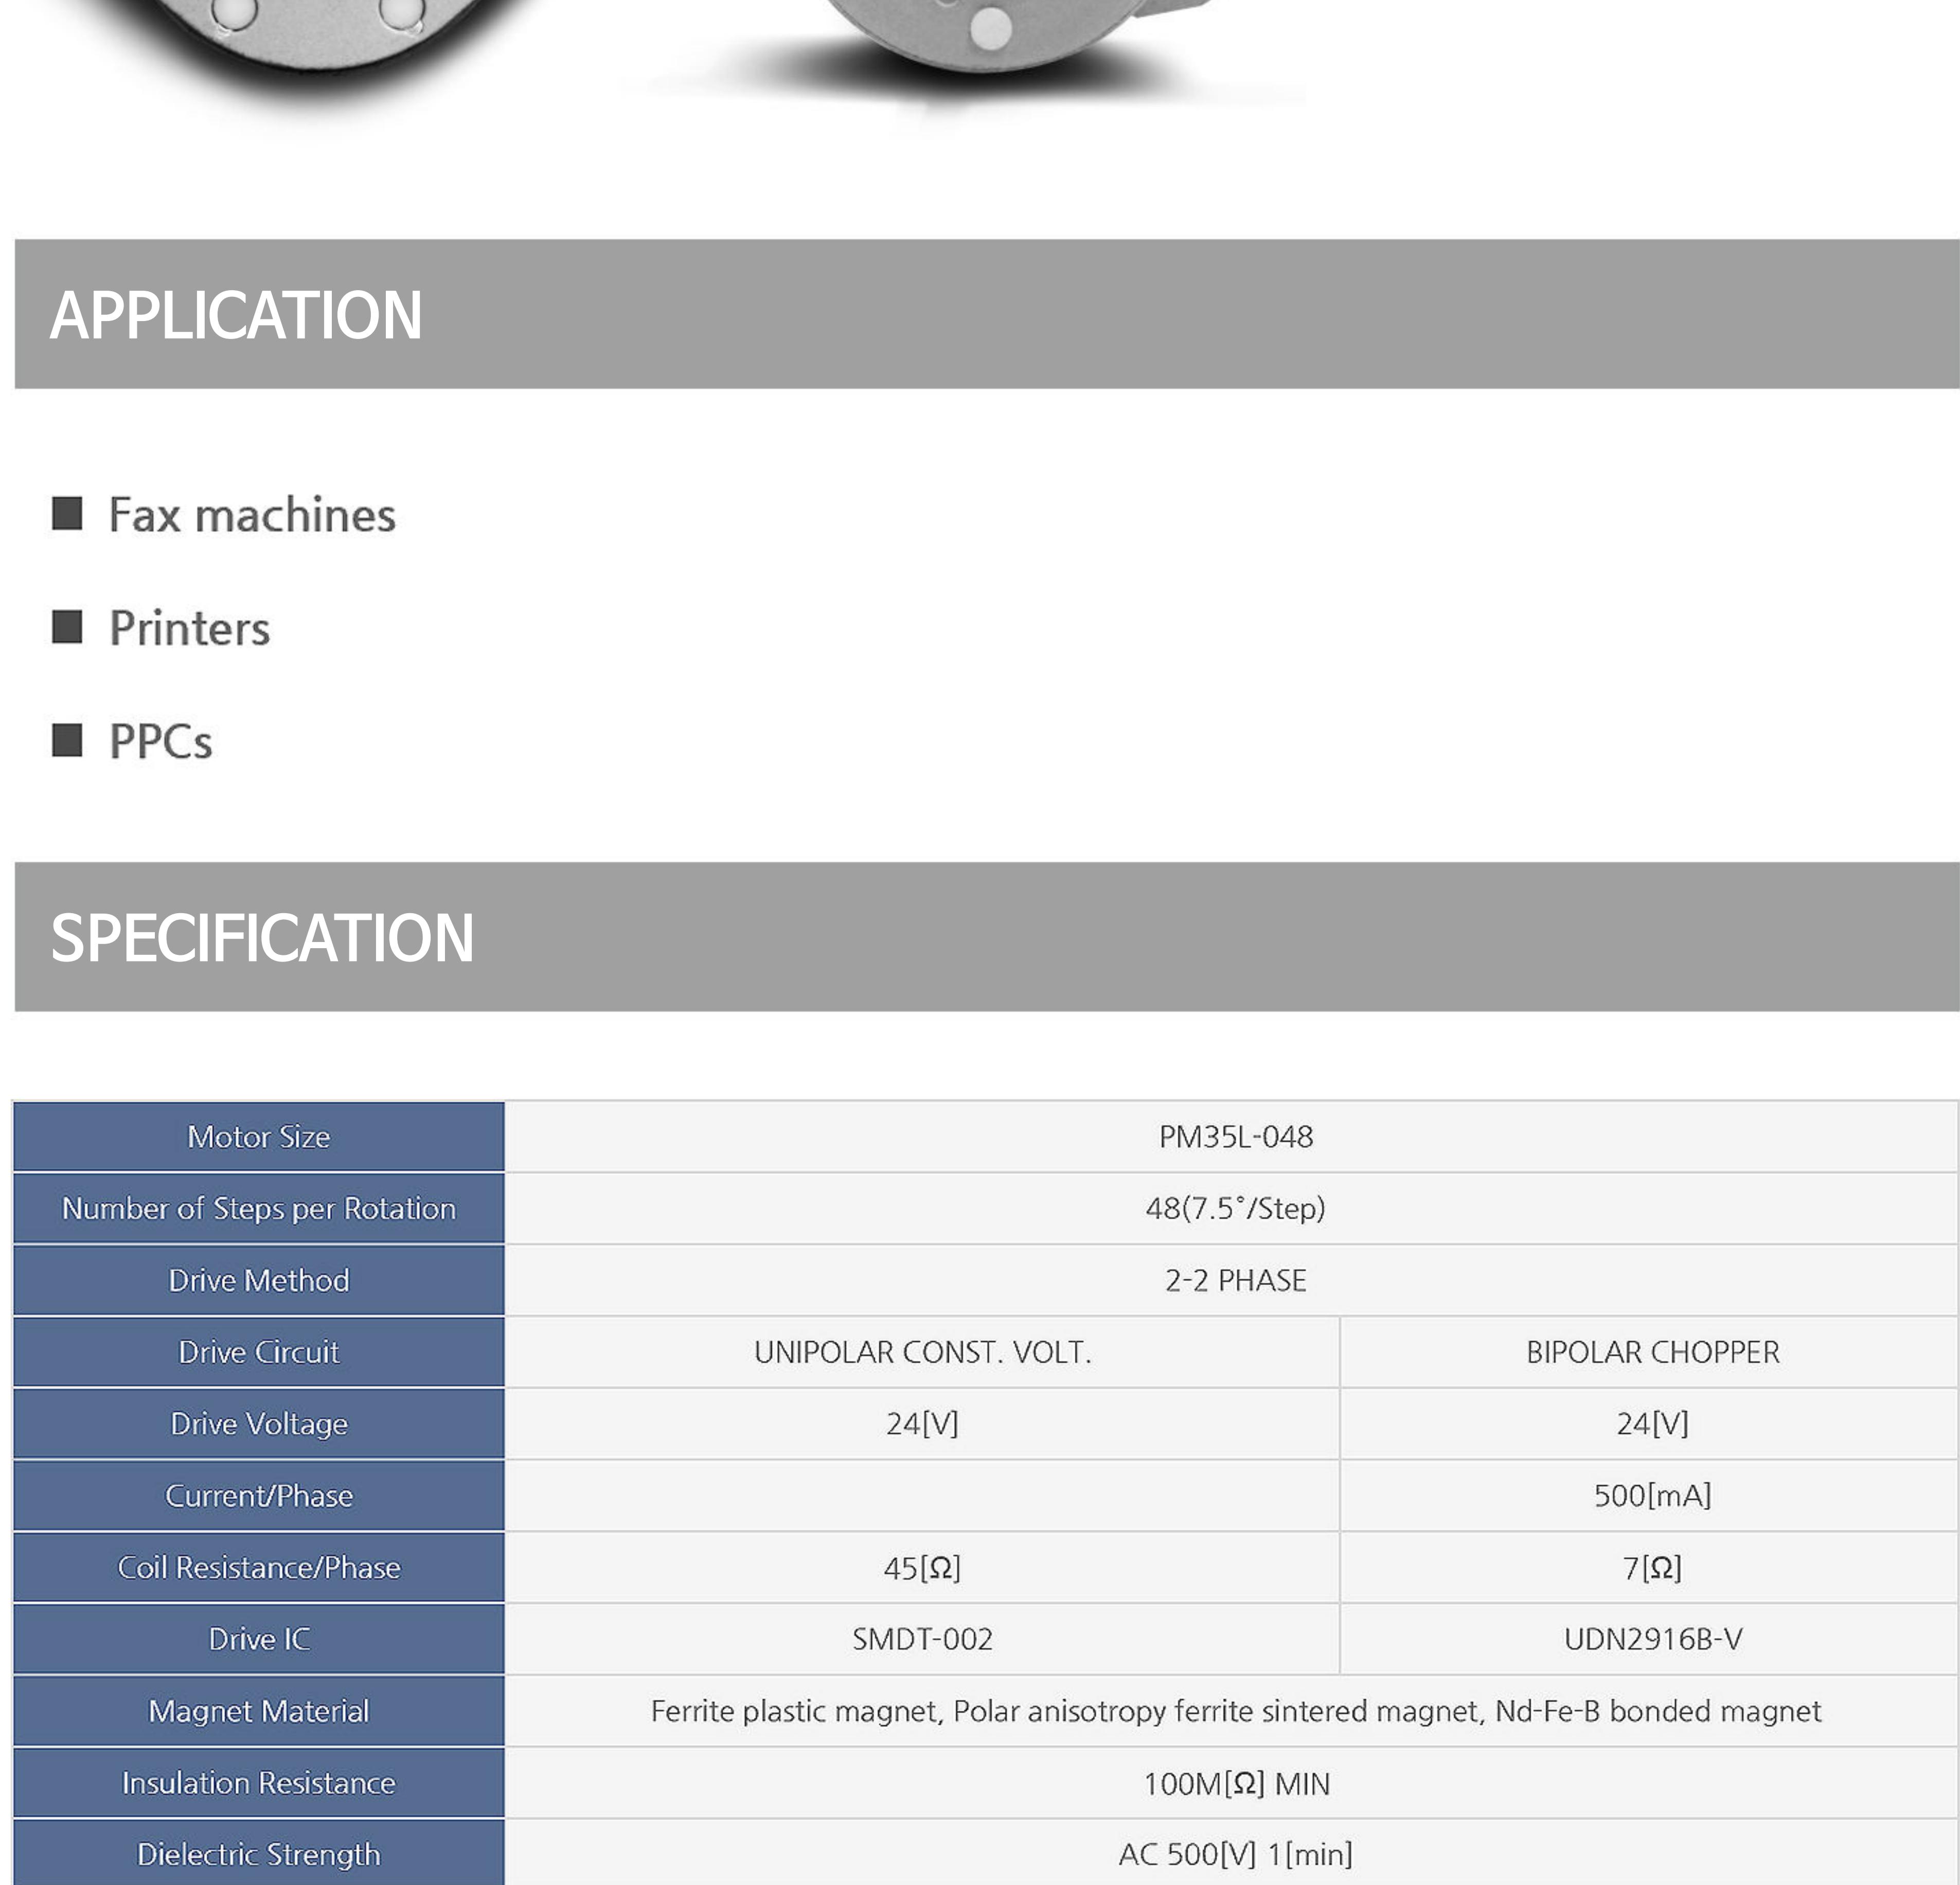

APPLICATION

■ Fax machines


■ Printers

■ PPCs

SPECIFICATION

Motor Size	PM35L-048	
Number of Steps per Rotation	48(7.5°/Step)	
Drive Method	2-PHASE	
Drive Circuit	UNIPOLAR CONST. VOLT.	BIPOLAR CHOPPER
Drive Voltage	24[V]	24[V]
Current/Phase		500[mA]
Coil Resistance/Phase	45[Ω]	7[Ω]
Drive IC	SMDT-002	UDN2916B-V
Magnet Material	Ferrite plastic magnet, Polar anisotropy ferrite sintered magnet, Nd-Fe-B bonded magnet	
Insulation Resistance	100M[Ω] MIN	
Dielectric Strength	AC 500[V] 1[min]	
Class of Insulation	CLASS E	
Operating Temp	-10[°C] ~ 50[°C]	
Storage Temp	-30[°C] ~ 80[°C]	
Operating Hum	20[%] RH ~ 90[%] RH	

PM35L-048 UNIPOLAR CONST. VOLT(at 24[V],45[Ω])

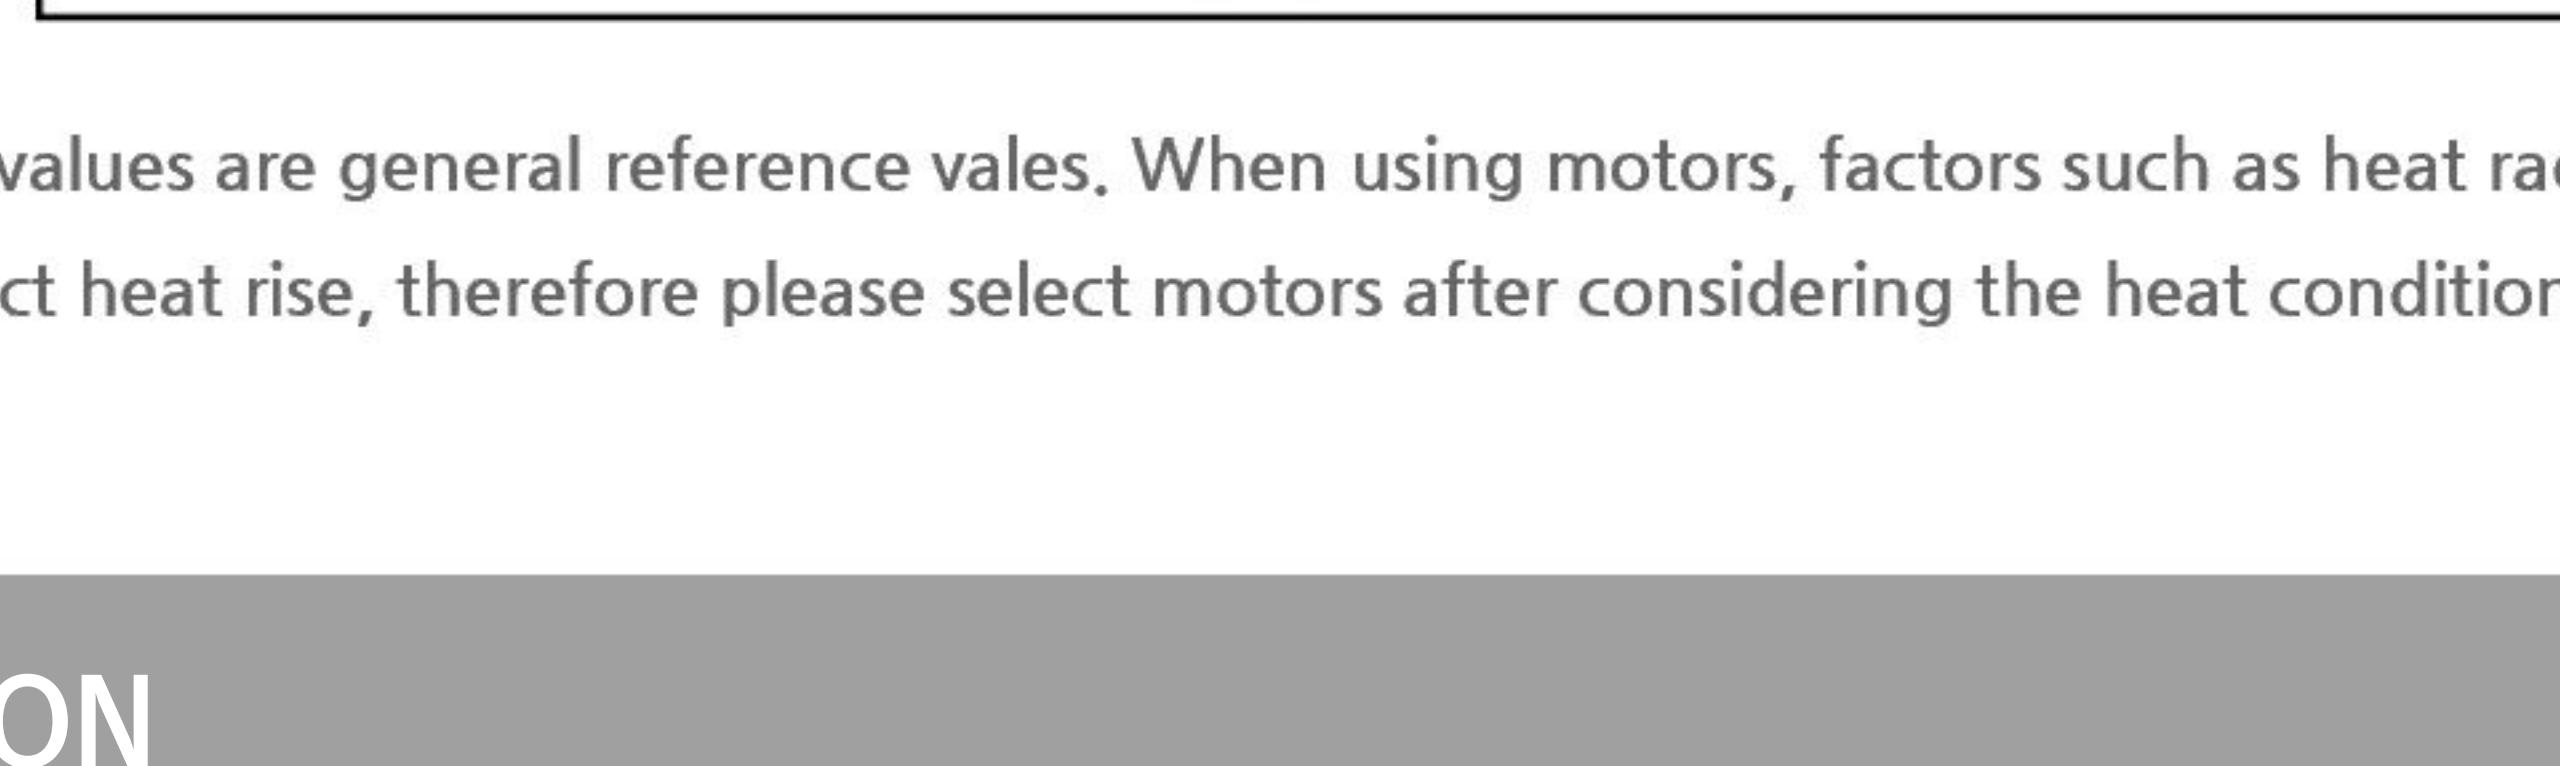

■ These torque values are general reference values. When using motors, factors such as heat radiation conditions and duty effect heat rise, therefore please select motors after considering the heat conditions in the actual equipment.

DIMENSION

